

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

RECORD COPY
CENTRAL FILE

(19) RÉPUBLIQUE FRANÇAISE
—
INSTITUT NATIONAL
DE LA PROPRIÉTÉ INDUSTRIELLE
—
PARIS
—

(11) N° de publication : 2 635 441
(à insérer que pour les
demandes de reproduction)

(21) N° d'enregistrement national : 88 10991

(51) Int Cl : A 23 G 3/00

(12)

BREVET D'INVENTION

13

B1

(54) CONCENTRÉS DE GOMME DE BASE A HAUTE TENEUR EN POLYMERES, LEUR PROCÉDE DE
PRÉPARATION ET LEUR UTILISATION DANS LA FABRICATION DE GOMME A MACHÉ

(22) Date de dépôt : 18.08.88.

(30) Priorité :

(60) Références à d'autres documents nationaux
apparentés :

(71) Demandeur(s) : Société dite : GENERAL
FOODS FRANCE. -FR.

(43) Date de la mise à disposition du public
de la demande : 23.02.90 Bulletin 90/08.

(72) Inventeur(s) : FRANCOIS BOUDY

(45) Date de la mise à disposition du public du
brevet d'invention : 27.12.91 Bulletin 91/52.

(56) Liste des documents cités dans le rapport
de recherche :

(73) Titulaire(s) :

Se reporter à la fin du présent fascicule

(74) Mandataire(s) : CABINET BROT et JOLLY

FR 2 635 441 - B1



PATENTS SUMMARY

04/23/99

Page 1

Country : France

Patent #: 2,635,441 B

Index#: 3279

Inventor: Francois Boudy

Issue Date: 12/27/91

Assignee: General Foods

Date of Application: 08/18/88

Title:

GUM BASE CONCENTRATES WITH HIGH POLYMER CONTENT, THEIR
PREPARATION PROCESS

AND THEIR USE IN CHEWING GUM PRODUCTION

Desc.:

The process for preparing gum base concentrate or premix, the product so produced and the use in gum are claimed. High molecular weight base components are ground into particles, mixed and plasticized. The mixture and fillers are added to an extruder in different ports. Top temperature is 120 degrees C and maximum time is 1.5 minutes.

Key Words:

10 CHEWING GUM

350 GUM BASE

352 Natural Rubbers

353 Synthetic Rubbers

361 Fillers

371 Softeners/Plasticizers

502 Base Manufacture/Preparation

506 Extrusion

564 Particle Size

569 Improved or Easier Processing

713 General Foods

805 France

RECORD COPY
CENTRAL FILE

GUM BASE CONCENTRATES WITH HIGH POLYMER CONTENT,
THEIR PREPARATION PROCESS AND THEIR USE IN CHEWING
GUM PRODUCTION [Concentrés de gomme de base à haute
teneur en polymères, leur procédé de préparation et
leur utilisation dans la fabrication de gomme à
mâcher]

French 2,635,441

3279

Translated from French

DH/rjs

4444/WR

10/23/90

70
350
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

[19] France

National Institute of Industrial Property, Paris

[11] Publication No.: 2 635 441

[12] Patent Application A1

[21] National Registry No.: 88 10991

[22] Application Date: August 18, 1988

[30] Priority:

[41] Promulgation Date:

[43] Date Application Laid Open to Public
Inspection: BOPI "Patents" No. 8 of
February 23, 1990

[51] Int. Cl.: A 23 G 3/30

[60] Citation:

[71] Applicant: General Foods France

[72] Inventor: François Boudy

[73] Assignee:

[74] Representative: Cabinet Brot et Jolly

[54] Title: GUM BASE CONCENTRATES WITH HIGH
POLYMER CONTENT, THEIR PREPARATION
PROCESS AND THEIR USE IN CHEWING
GUM PRODUCTION

[57] ABSTRACT

The invention relates to a process for preparing a gum base concentrate with a high polymer content of the type including high molecular weight elastomers, plasticizers and mineral fillers.

This process is characterized by the fact that the high molecular weight elastomers are ground into particles, these particles are mixed in the desired proportions and plasticized; the resulting mixture and the mineral fillers are introduced separately in the desired proportions in a twin-screw extruder 6 with sleeves 0, 1', 2', 3',

4', 5', in which the temperature does not exceed 120°C or the elastomer mixture does not remain more than about one minute and thirty seconds, and whose screw speed is less than about 120 rpm, and the concentrate exiting the extruder is recovered.

**GUM BASE CONCENTRATES WITH HIGH POLYMER CONTENT, THEIR PREPARATION
PROCESS AND THEIR USE IN CHEWING GUM PRODUCTION**

The present invention relates to gum base concentrates with high polymer content which can be used in the preparation of gum base for chewing gums.

The invention also relates to the preparation of such concentrates and their use in the production of chewing gums.

It is known that gum bases normally include high molecular weight polymers, mineral fillers and plasticizers. High molecular weight polymers include, but are not limited to, isoprene-isobutylene copolymers, styrene, butadiene and polyisobutylene, while low molecular weight polymers include polyisobutylene and polyvinyl acetate. Plasticizers include resins of rosin and waxes.

Gum bases can be prepared directly by the chewing gum manufacturers. They can also be produced separately and be sold as semi-finished products.

They are usually produced in two stages.

In a first stage, a premix based on polymers, plasticizers and mineral fillers is prepared. This premix is then transferred into a mixer, where the rest of the usual components of the gum base are added. This second stage does not concern the present invention, and we will discuss in the following only the production and formulation of the premixes.

The premixes can be prepared by dissolving the main polymer at a high temperature in the other materials. This dissolving operation lasts about 3-6 hours and is performed in an open mixer with moveable blades called a "pug mill," in which the mixture is held between 120 and 150°C throughout the operation. This technique, however, has the drawback that the polymer undergoes degradations in the elastic chains due to the temperature at which

the dissolving is performed and due to the duration of a cycle. As a result, the product obtained has mediocre elasticity, whereas good elasticity is an important characteristic of a satisfactory premix.

The premix of the base polymer and the other materials can also be performed at constant volume and under pressure in a high-powered shearing mixer known as a "pug mill." The duration of a mixing cycle is 20-30 minutes, and the product undergoes considerable mechanical and thermal stresses.

This process, like the one described above, thus involves degradation of the elastic properties of the polymer. Furthermore, such a process cannot be applied to the preparation of tacky or viscous products, and it requires the resulting mixture to have a certain consistency.

Finally, the premix can be conducted by co-extruding the different components, but this process, which combines the effects of temperature, pressure and shearing, also involves degradation of the elastic properties of the polymer.

Regardless of the technique used to prepare these premixes, they never contained more than about 50% polymer by weight.

The present invention intends to remedy the drawbacks of the above-described prior art.

One purpose of the present invention is therefore to propose a process for preparing a concentrate with a high polymer content that can attain and exceed 85% by weight, which does not substantially alter the elastic properties of these polymers.

Another purpose of the invention is to propose a process that can be used without restrictions for preparing the concentrate with a high content of polymers, even viscous or tacky ones.

Another purpose of the invention is a concentrate whose polymer content can attain and exceed 85% by weight.

The invention also intends to propose a concentrate of this type that exhibits satisfactory elasticity for preparing chewing gums.

Finally, the invention aims to propose a concentrate such that industrialists can easily apply it to the preparation of their own products by adding to it the additives they normally use in the necessary proportions.

For this purpose, the object of the invention is a process for preparing a gum base concentrate with a high polymer content of the type including high molecular weight elastomers, plasticizers and mineral fillers, characterized by the fact that high molecular weight elastomers are ground to the form of particles; these particles and plasticizers are mixed in the desired proportions; the resulting mixture and the mineral fillers are introduced separately in the desired proportions in a twin-screw extruder with sleeves, in which the temperature does not exceed 120°C, in which the elastomer mixture does not spend more than about 1 min 30 sec, and whose screw speed is less than about 120 rpm, and the concentrate exiting the extruder is recovered.

In this definition of the process according to the invention, in the rest of the description and in the claims that follow, the term high molecular weight elastomers refers to elastomers having a numerical molecular weight of at least 220,000 and a molecular weight by weight of at least 450,000.

Advantageously, the mixture of high molecular weight elastomer and plasticizers will be introduced into the sleeve arranged furthest upstream in the twin-screw extruder, while the mineral fillers are introduced downstream, preferably in two different sleeves of the extruder to enhance their

distribution in the finished product. The particles of ground elastomer may have a size on the order of 5 mm.

In the event tacky materials such as low molecular weight elastomers must be present in the concentration thus prepared, they are introduced in the molten state into the twin-screw extruder downstream from the mixture of high molecular weight elastomers and plasticizers and upstream from the mineral fillers. By low molecular weight elastomers we mean elastomers having a molecular weight by number less than 4,000 and a molecular weight by weight less than 150,000.

The process in accordance with the invention therefore aims to avoid exposing the elastic chains of the elastomer to excessive temperature and shear stresses or subjecting them to such stresses for too long.

An embodiment of this process will be described in the following in greater detail as a non limiting example with reference to the attendant drawings. In these drawings:

Figure 1 is a schematic view of the apparatus used in this embodiment of the process;

Figures 2a, 2b and 2c are diagrams illustrating the conditions of operation of the five-sleeve extruder of this apparatus.

As we see in figure 1, the high molecular weight elastomer is first ground into particles of the same size of five millimeters in an impact disc mill 1. The ground product is then mixed in a ribbon mixer 2 with plasticizers (resins of rosin, waxes, etc) fed through line 3, and the resulting mixture is transferred into a vibrating weight metering hopper 4.

The mineral fillers to be added to the product (talc and calcium carbonate) are loaded into two vibrating weight metering hoppers 5.

These different metering hoppers then introduce the materials they contained in specific proportions into a twin-screw extruder 6, which in this case, is a "five-sleeve" extruder (recall that, in the usual classification of extruders, the input sleeve, or sleeve 0, is not taken into account; in the present installation, the extruder thus actually includes six sleeves 0, 1', 2', 3', 4' and 5'). More precisely, after preheating twin-screw extruder 6, while the screws are driven by the motor, the premix consisting of high molecular weight elastomer and plasticizers is fed into sleeve 0, or the input sleeve of the extruder, while the mineral fillers are introduced by the two metering hoppers 5 in two different sleeves, for example, sleeves 0 and 2', of the twin-screw extruder to improve the homogeneity of the finished product.

If the concentrate being prepared must contain low molecular weight elastomers, the latter are fed in the molten state into a tank 8, heated to a temperature of 100-120°C by oil circulating in a closed circuit 9 from a boiler 10. These elastomers are then injected by a gear pump 11 into sleeve 1'.

The entire assembly may, naturally, operate continuously.

The screws of extruder 6 may rotate in the same or different directions.

For a given flow rate, their rotational speed will be chosen such as to minimize degradation of the polymer while insuring satisfactory entry of the materials into the machine.

At the rate of 120 kg/hr, using a five-sleeve extruder whose screws have a diameter of 64 mm and a length equal to 29 times the diameter (extruder type

known as 29 D), the rotational speed of the screws may range from 80 to 100 rpm.

For a five-sleeve extruder in each case, the following table gives the temperatures for each of the sleeves.

Sleeve	Temperature
0	12°C
1'	60°C
2'	60°C
3'	80°C
4'	80°C
5'	80°C
Extrusion nozzle	70°C

After a residence time of 1 min 30 sec in the twin-screw extruder, the concentrate with high polymer content exits the extrusion nozzle at a temperature in the range of 100-120°C.

Figures 2a, 2b and 2c, which must be considered as arranged end-to-end, illustrate the treatments undergone in this case by the materials mixed in the five sleeves of the extruder. The abbreviations used in these diagrams have the following definitions:

TSF: transfer,

LM: low-shear mixing,

HM: high-shear mixing,

CM: counterthread mixing.

By applying the above conditions, the apparatus we have just described makes it possible to produce concentrates with high polymer contents having satisfactory elasticity for the preparation of chewing gums.

The concentrates thus prepared may thus have, depending on the intended use, a composition within the following composition range, in weight percent:

- high molecular weight elastomers: 30 to 85%
- low molecular weight elastomers: 0 to 5%
- rosin resin: 8 to 10%
- wax-type plasticizer: 2 to 10%
- mineral fillers: 5 to 10%

A gum base concentrate intended for the preparation of chewing gum tablets will preferably have the following composition in weight percent:

- elastomers: 85%
- mineral fillers: 18%
- plasticizers: 2%

The high molecular weight elastomers used in this case may have molecular weights in number Mn and in weight Mw which vary depending on the rotary speed of the five-sleeve twin-screw extruder's screw.

These weights will be, for example, as follows:

	Mn	Mw
— Continuous production at 80 rpm	135 900	208 800
— Continuous production at 100 rpm	131 800	200 000
— Continuous production at 120 rpm	128 800	196 400

For a concentrate intended for the preparation of bubble gum, a preferred composition will be as follows in weight percent:

- elastomers: 32%
- mineral fillers: 52%
- plasticizers: 16%

The high molecular weight elastomers used in this case may have the following characteristics as a function of the speed of the five-sleeve twin-screw extruder screw:

	Mn	Mw
— Continuous production at 80 rpm	86 500	459 700
— Continuous production at 100 rpm	79 700	609 000

In the concentrates thus prepared, the initial elastic properties of the elastomers are not altered by the preparation process and are practically unchanged in the finished product.

Claims

1. Method of preparing a gum base with a high polymer content, of the type containing high molecular weight elastomers, plasticizers and mineral fillers, characterized by the fact that high molecular weight elastomers are ground to particles; these particles and the plasticizers are mixed in the desired proportions; the resulting mixture and the mineral fillers are introduced separately into a double-screw extruder (6) with jackets (0, 1', 2', 3', 4', 5'), in which the temperature does not exceed 120°C, where the elastomer mixture does not remain for more than about one minute and 30 seconds and which has a screw speed of less than about 120 rpm; and the concentrate exiting the extruder is collected.

2. Method according to Claim 1, characterized by the fact that the high molecular weight elastomers are ground to particles having a maximum size on the order of 5 mm.

3. Method according to one of Claims 1 and 2, characterized by the fact that the mixture of high molecular weight elastomers and plasticizers is introduced into the jacket (0) arranged the furthest upstream from the double-screw extruder (6), while the mineral fillers are introduced downstream from this mixture.

4. Method according to Claim 3, characterized by the fact that the mineral fillers are introduced into two different jackets (0, 2') of the double-screw extruder (6).

5. Method according to one of Claims 1-4, characterized by the fact that low molecular weight polymers are introduced in the molten state into the double-screw extruder (6) downstream from the mixture of high molecular weight.

6. Method according to one of Claims 1-5, characterized by the fact that the double-screw extruder (6) is a an extruder with five jackets (0, 1', 2', 3', 4', 5').¹

7. Gum base concentrate prepared by a method according to Claims 1-6.

8. Gum base concentrate according to Claim 7, characterized by the fact that it contains at least 30% and preferably 85% by weight of polymer.

9. Use of a gum base concentrate according to one of Claims 1-8 for the manufacture of chewing gum.

¹ Text says "five jackets" but lists six numbers.—Tr.

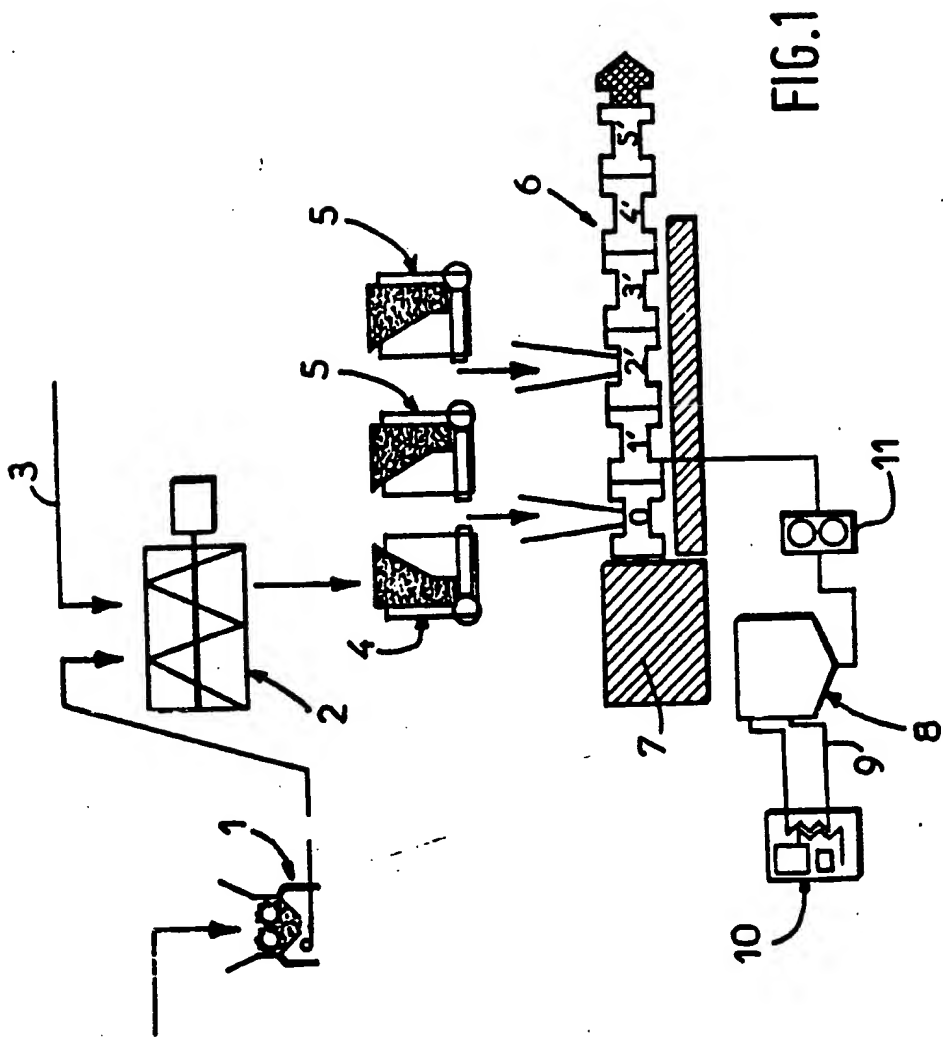


FIG. 1

212

